Programmacontroller TEIG

Congratulations on your purchase of your TEIG. TEIG is an easy to use growing machine for plants. By using TEIG you can keep your plants longer and fresher.

For your 1st commissioning, we would like to ask you to first watch the videos on the internet about the assembly. A standard program is installed in the Teig for the times of light and water. You can achieve a perfect growth result with this. If you want to improve your performance even further, you can make adjustments in the program with the instructions below. On behalf of the TEIG team, we wish you a lot of growing pleasure!

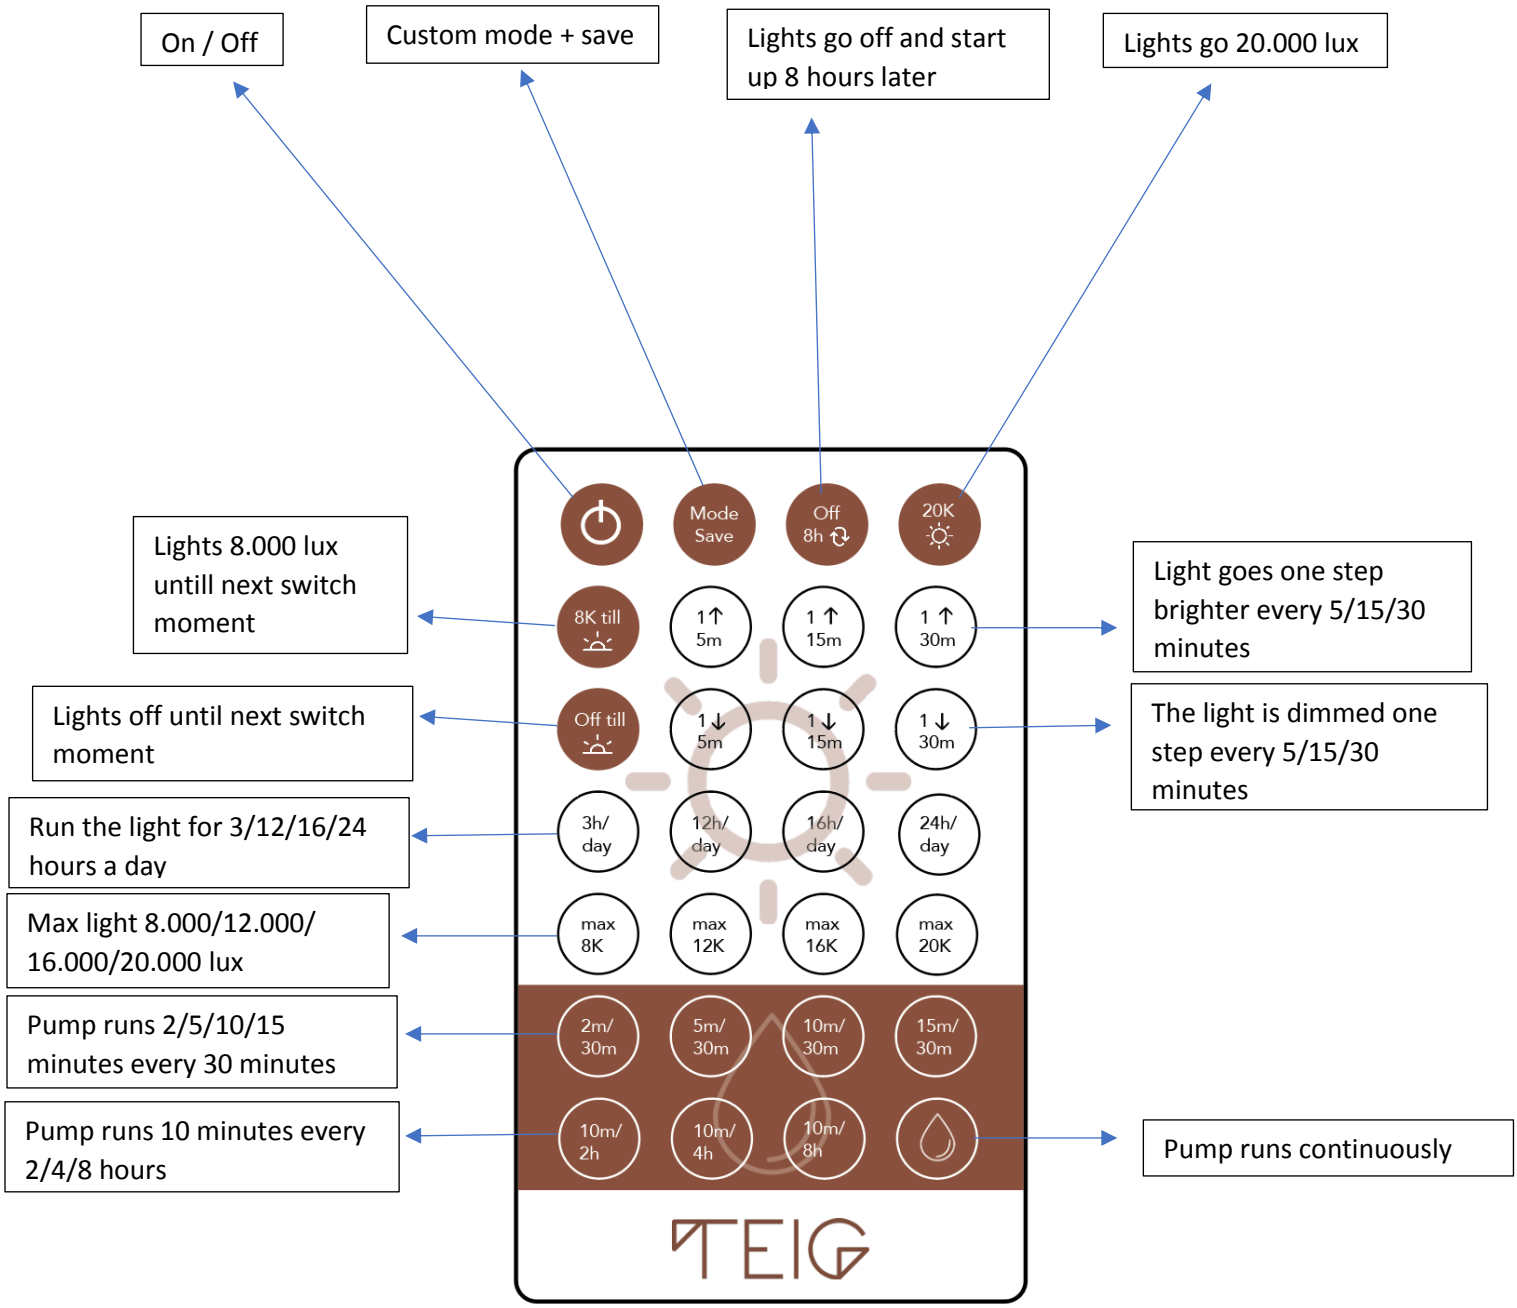

Buttons always for use, not programbuttons

On / off: When you click this button the TEIG will turn on or off

Mode Save: Press this button for longer then 3 seconds until the red light starts blinking. For example, Mode Save -> 3h/day -> Mode Save. Now it keeps 3h/day mode.

Off 8h: The lights will go off and turn on 8 hours laters. (restart the start of the program.)

20K: lighting switches to 20K strength

8K till: Lighting 8K strength until next switching moment in program.

Off till: Lighting off until next switching moment in program.

Programming

The remote is for programming the TEIG. You only use this to properly set it up so that you no longer have to use the remote control. When using the remote control, aim directly at the TEIG device.

Before installing the TEIG to your own personalized settings, you must turn the TEIG off by pressing the On/Off button. When the light stays on red, the TEIG is off. Now you have to press and hold the Mode Save button for about 3 seconds until the red light starts flashing. The TEIG now goes into setting mode and all white buttons are usable. Now you can click on the buttons that you want to set. When you are finished you have to click on the Mode Save button again and the settings are saved. When you turn on the TEIG, the newly saved settings will be activated. The choice is yours to set it up as you wish. We recommend that you use the factory settings.

Reset to factory settings

The factory settings of the TEIG are as follows. The lamp will turn on for the next 16 hours and then turn off for 8 hours. The pump will run every 2 minutes of the 30 minutes. This cycle keeps repeating itself.
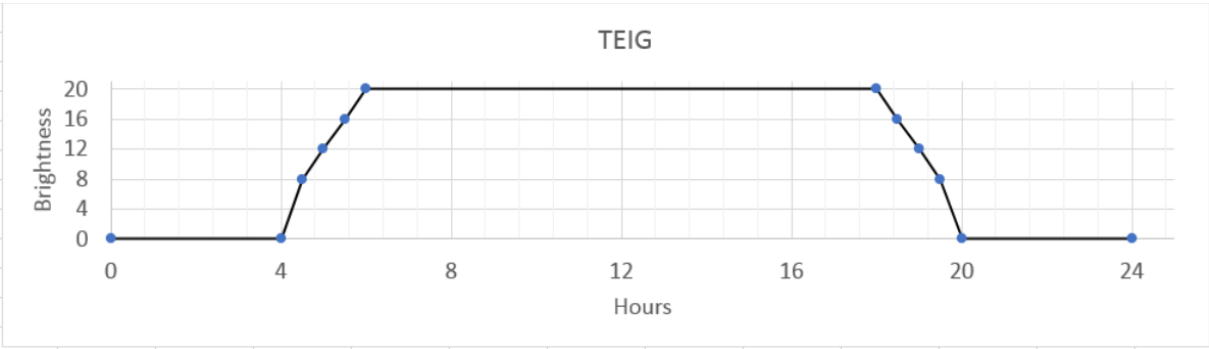
To reset the TEIG to factory settings, press the button on the TEIG and then insert the power plug into the TEIG. The red light should flash 1 time, then you can release the button and the TEIG has been restored to factory settings. See the brightness cycle down below.